



Separator max. flow: 30 l/s

h = inlet distance from ground (default 1500):

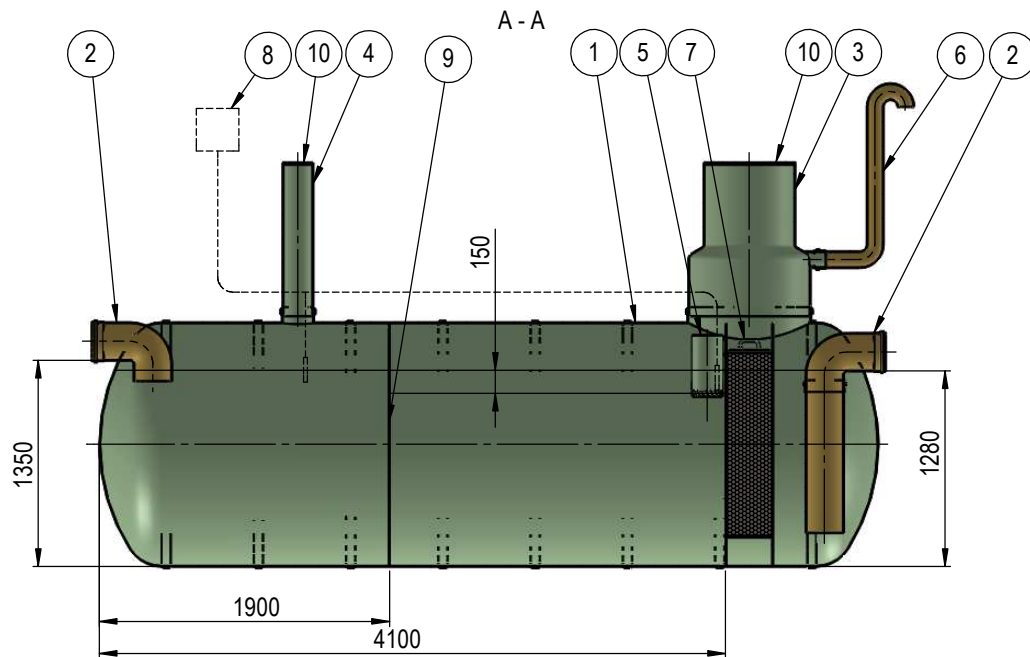

Item	Part	Description	Std. qty.	Need
1	Separator housing	fiberglass, $\varnothing$ 1600 x 5100	1	
2	Inlet/outlet sewer	DN250	2	
3	Maintenance shaft	$\varnothing$ 800/600	1	
4	Sediment removal shaft	$\varnothing$ 200	1	
5	Oil removal shaft	$\varnothing$ 200	1	
6	Ventilation outlet	DN110	1	
7	Coalescer block		1	
8	Level alarm device		1	
9	Separation wall		1	
10	Top cover	plastic	1	
		cast iron		



Weight

Date

6.04.2021

Drawn by E. Väljaots

Drawing no. KPK.30.01



**Klaasplast OÜ**  
 reg.kood: 11862070  
 tel: +372 5691 1914  
 info@mahuti.ee  
 www.mahuti.ee

Title

I-class oil separator with a sludge trap

Sheet 1/1

Scale 1 : 30

Article no.

NS30 LM3000