

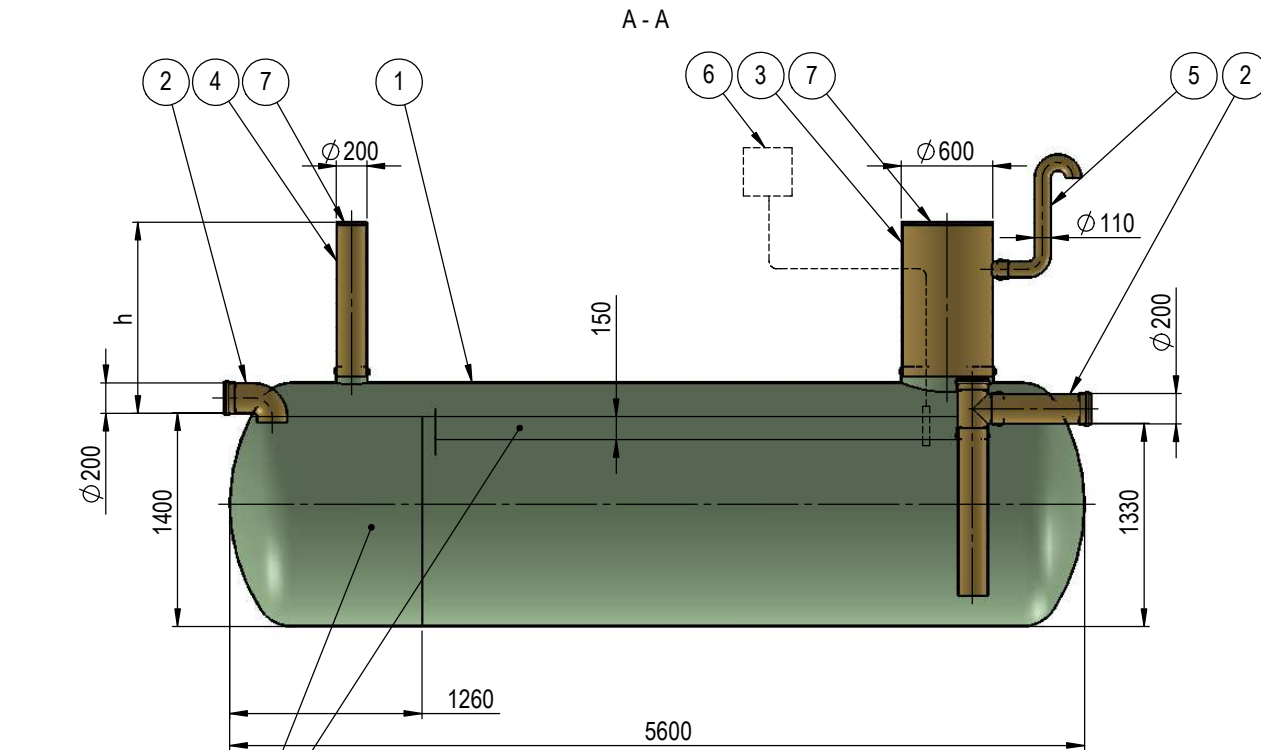


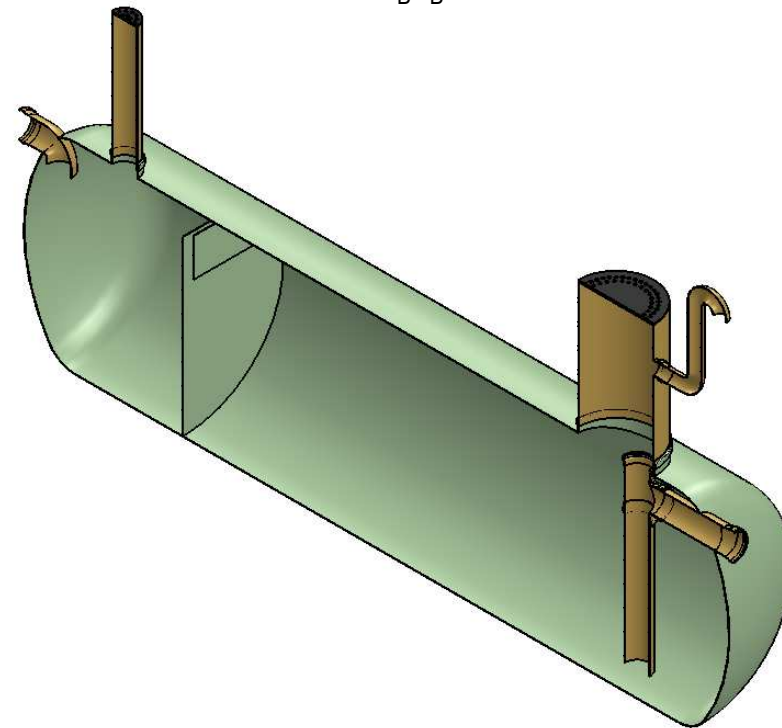

Sediment capacity 2060 l
Grease layer capacity 800 l

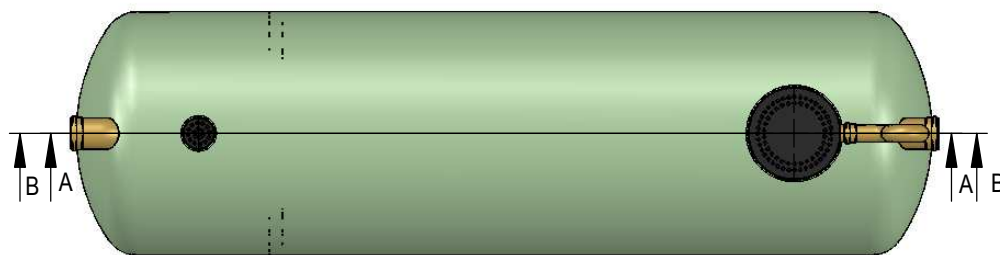


B - B

CE
EN 1825

Separator max. flow: 20 l/s
h = height as needed 900 ... 2500 (mark to table)

Item no.	Part	Description	Std. qty.	Need
1	Separator housing	fiberglass, $\varnothing$ 1600 x 5600	1	
2	Inlet/outlet sewer	DN200	2	
3	Maintenance shaft	$\varnothing$ 600, height as needed	1	
4	Maintenance shaft	$\varnothing$ 200, height as needed	1	
5	Ventilation outlet	DN110, height as needed	1	
6	Level alarm device		1	
7	Top cover	plastic	2	
		cast iron		



Weight

Date

27.01.2021

Drawn by E. Väljaots

Drawing no. KPR.20.01



Klaasplast OÜ
reg.kood: 11862070
tel: +372 5691 1914
info@mahuti.ee
www.mahuti.ee

Title

Grease separator tank

Sheet
1/1

Scale
1 : 30

Article no.

NS20