

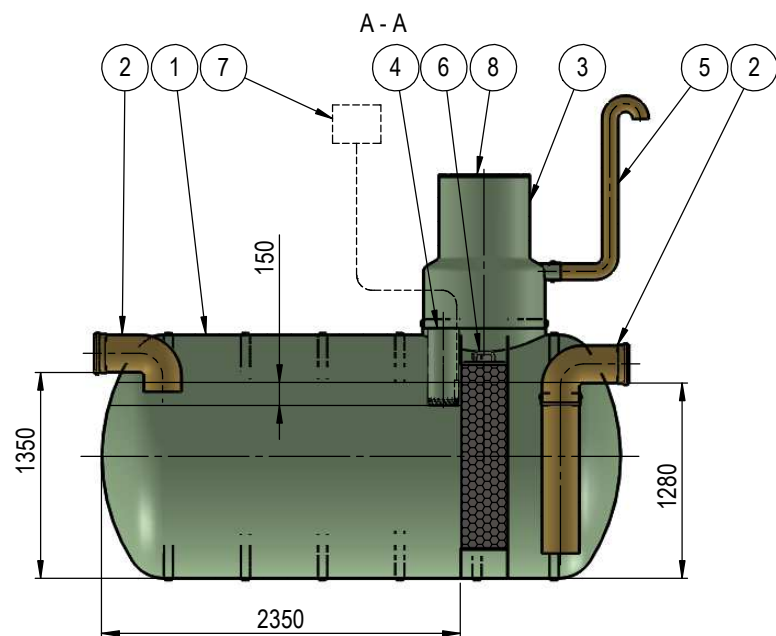


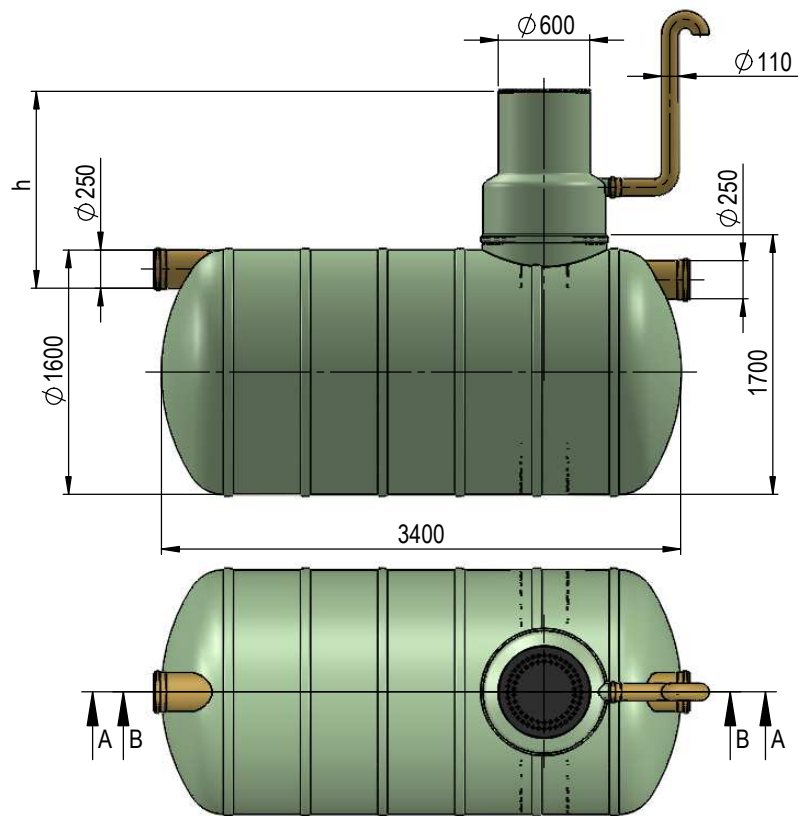

B - B

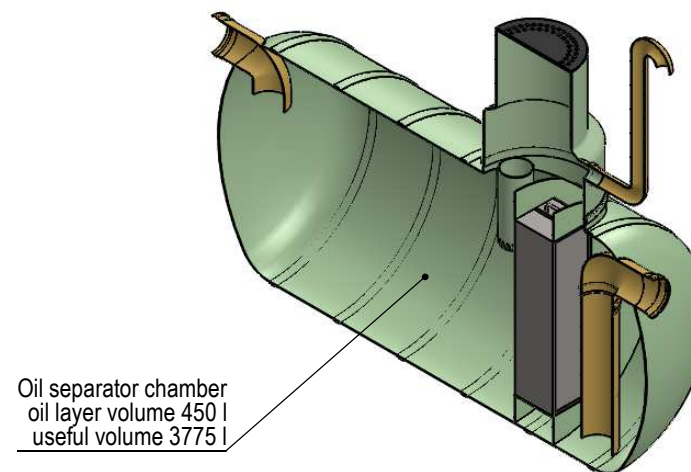

Oil separator chamber
oil layer volume 450 l
useful volume 3775 l

CE
EN 858-1

Separator max. flow: 30 l/s

h = inlet distance from ground (default 1500):

Item	Part	Description	Std. qty.	Need
1	Separator housing	fiberglass, $\varnothing$ 1600 x 3400	1	
2	Inlet/outlet sewer	DN250	2	
3	Maintenance shaft	$\varnothing$ 800/600	1	
4	Oil removal shaft	$\varnothing$ 200	1	
5	Ventilation outlet	DN110	1	
6	Coalescer block		1	
7	Level alarm device		1	
8	Top cover	plastic	1	
		cast iron		
		Weight	Date	Drawn by E. Väljaots
			7.04.2021	Drawing no. KPO.30.01
		Title		
Klaasplast OÜ reg.kood: 11862070 tel: +372 5691 1914 info@mahuti.ee www.mahuti.ee		I-class oil separator		
Sheet	Scale	Article no.		
1/1	1 : 30	NS30		