
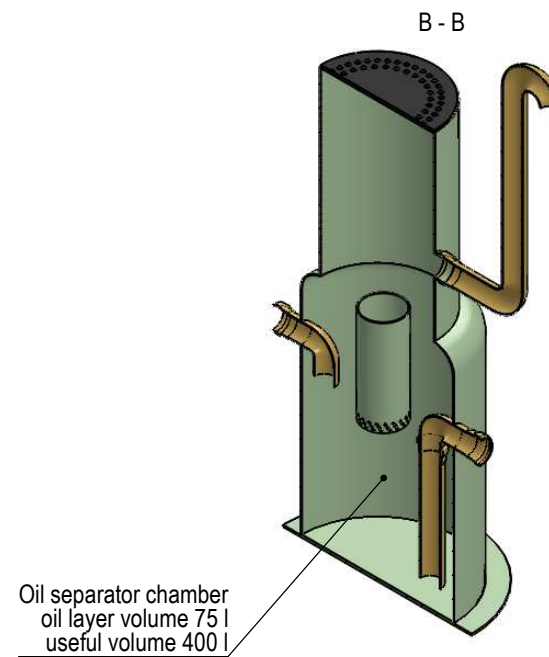
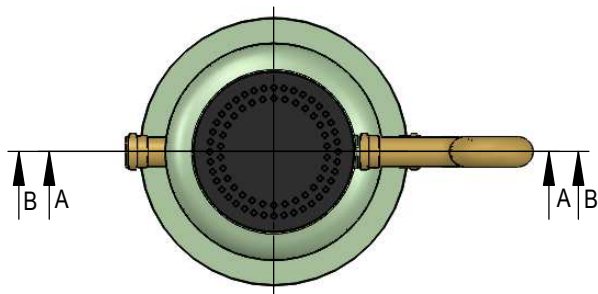
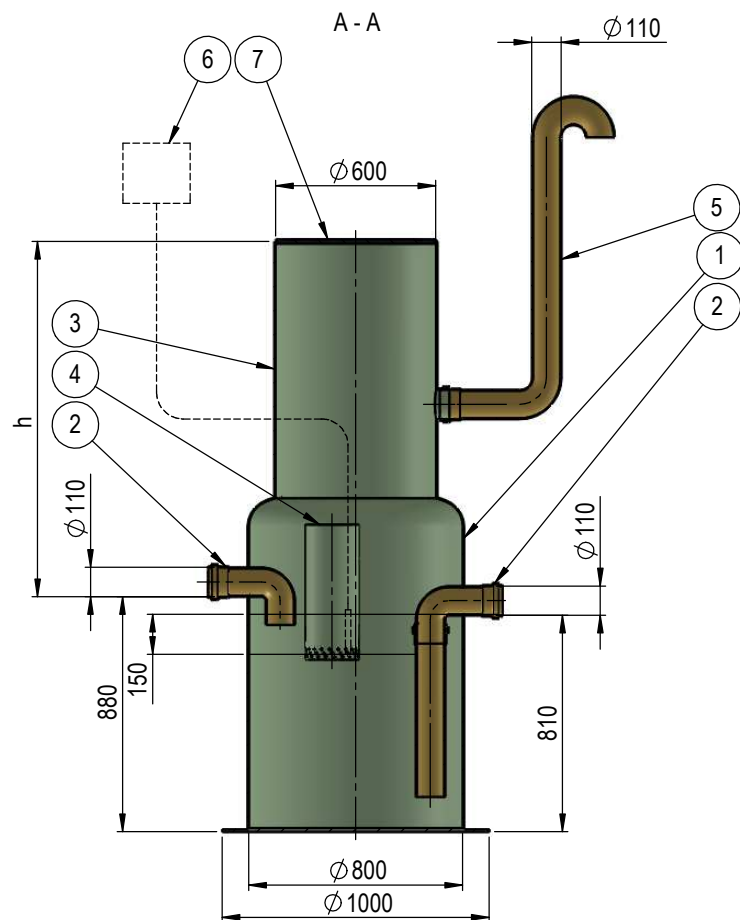




Separator max. flow: 1.5 l/s
h = inlet distance from ground (default 1500):

CE
EN 858-1

Item	Part	Description	Std. qty.	Need
1	Separator housing	fiberglass, ϕ 800	1	
2	Inlet/outlet sewer	DN110	2	
3	Maintenance shaft	ϕ 800/600	1	
4	Oil removal shaft	ϕ 200	1	
5	Ventilation outlet	DN110	1	
6	Level alarm device		1	
7	Top cover	plastic	1	
		cast iron		
		Weight	Date	Drawn by E. Väljaots
			7.04.2021	Drawing no. KPP.01.01
		Title		
Klaasplast OÜ reg.kood: 11862070 tel: +372 5691 1914 info@mahuti.ee www.mahuti.ee		II-class oil separator		
Sheet	Scale	Article no.		
1/1	1 : 20	NS1.5		