


B - B




Oil separator chamber
oil layer volume 225 l
useful volume 1300 l

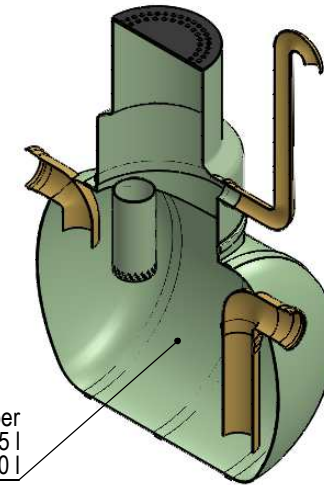

Separator max. flow: 15 l/s
h = inlet distance from ground (default 1500):

Item	Part	Description	Std. qty.	Need
1	Separator housing	fiberglass, ϕ 1200 x 1600	1	
2	Inlet/outlet sewer	DN200	2	
3	Maintenance shaft	ϕ 800/600	1	
4	Oil removal shaft	ϕ 200	1	
5	Ventilation outlet	DN110	1	
6	Level alarm device		1	
7	Top cover	plastic	1	
		cast iron		

	Klaasplast OÜ reg.kood: 11862070 tel: +372 5691 1914 info@mahuti.ee www.mahuti.ee	Weight	Date	Drawn by	E. Väljaots
			7.04.2021	Drawing no.	KPP.15.01
		Title		II-class oil separator	
Sheet	Scale	Article no.			
1/1	1 : 30	NS15			