
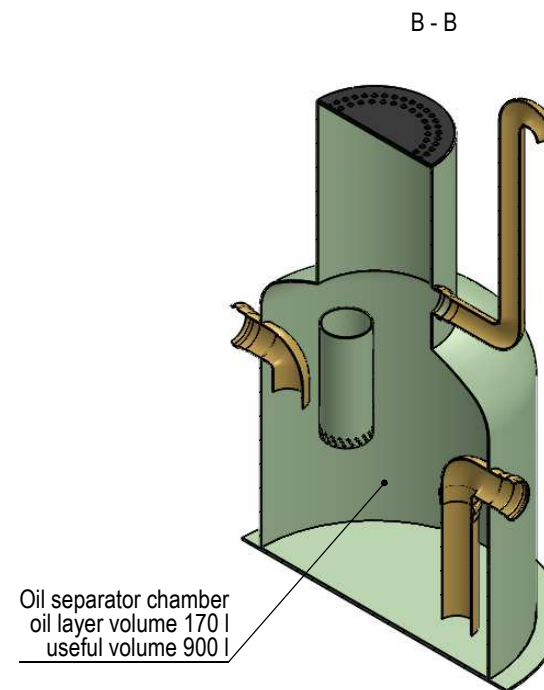
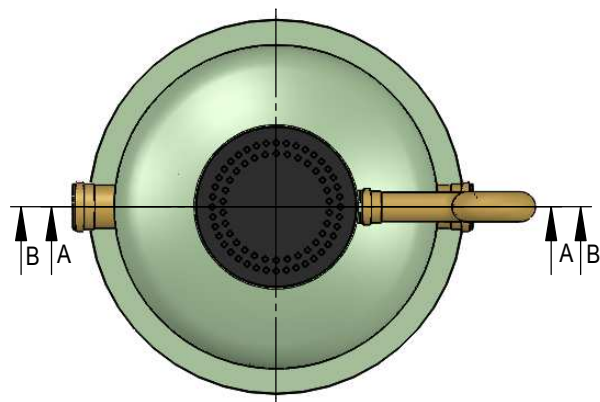
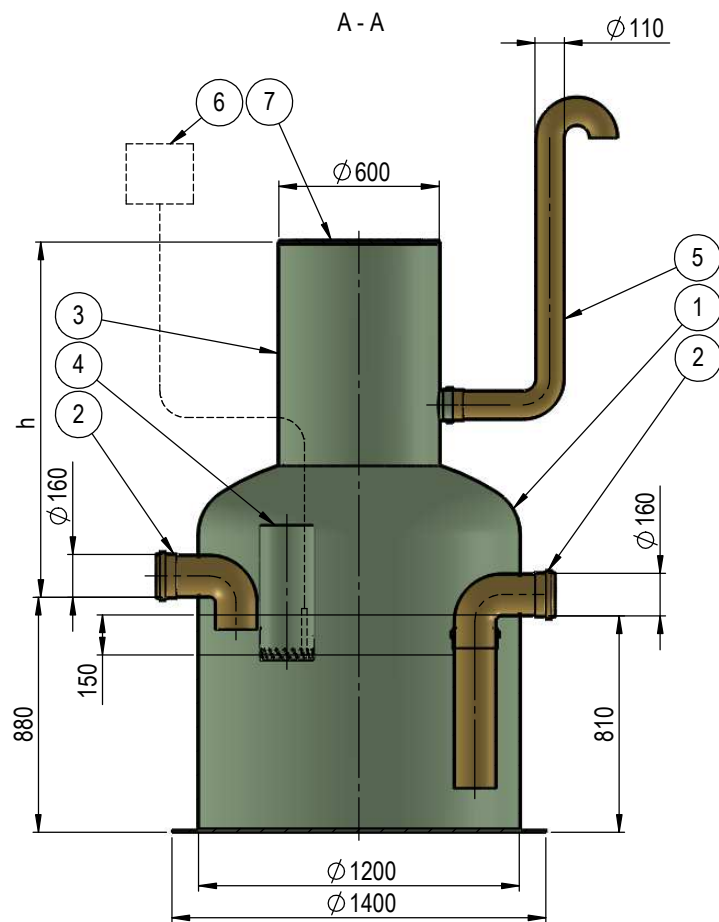




Separator max. flow: 6 l/s
h = inlet distance from ground (default 1500):

Item	Part		Description	Std. qty.	Need
1	Separator housing		fiberglass, Ø 1200	1	
2	Inlet/outlet sewer		DN160	2	
3	Maintenance shaft		Ø 800/600	1	
4	Oil removal shaft		Ø 200	1	
5	Ventilation outlet		DN110	1	
6	Level alarm device			1	
7	Top cover		plastic	1	
			cast iron		
		Weight	Date	Drawn by E. Väljaots	
			7.04.2021	Drawing no. KPP.6.01	
 Klaasplast OÜ reg.kood: 11862070 tel: +372 5691 1914 info@mahuti.ee www.mahuti.ee			Title		
			II-class oil separator		
			Sheet	Scale	Article no. NS6
			1/1	1 : 20	